

2-Port PS/2 KVM Switch w/ Audio

Product Overview

The KVM-0211 2-Port PS/2 KVM Switch with Audio from LevelOne offers users with an easy to install KVM switch that can manage two computers from a single monitor, keyboard and mouse. With audio support, users can connect a single set of speakers directly to the KVM switch and enjoy listening to music and watching movies from either computer without switching cables.

It allows users to access, control, boot and reboot two PS/2-enabled multimedia computers using a single PS/2 keyboard, mouse and monitor and a speaker set and microphone.

Flexible Multimedia Feature

Users are now offered with flexible multimedia support. The KVM-0211 offers users with user-programmable simultaneous or independent PC and audio switching. This enables users to listen to music from one computer while simultaneously using the other computer for work or fun.

One Keyboard, Mouse and Monitor controlling Two Computers

The LevelOne KVM-0211 connects two computer systems to a single PS/2 keyboard, PS/2 mouse and monitor. The 2-Port PS/2 KVM Switch also provides audio support allowing users to connect the audio ports of each computer to the KVM switch.

The KVM-0211 is a Plug-and-Play KVM switch that requires no power supply and no additional software installation. Users simply connect the KVM switch to the PS/2 mouse and keyboard and screen ports on each computer as well as the audio ports by using the included cables.

Easy to Switch between Computers

The KVM-0211 switches between computers either through the pushbuttons located on the switch or by using keyboard hot keys. The KVM switch also offers user the ability to program the auto-scan function for automatic switching between computers.

The LED display offers an "at-a-glance" status display for easy computer activity assessment.



KVM-0211

Key Features

- Flexible switching for an uninterrupted multimedia experience
- Control and manage two computers using a single PS/2 keyboard mouse and monitor
- Simultaneous or independent PC and Audio user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- Easy switching between computers with Auto-scan, keyboard hotkeys and push button selection
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- PS/2 interface power supply

Technical Specification

Device Interface

- **PC Connections**
2
- **PC Port Connectors**
2x HDB 15-pin female (Integrated with PS/2 interface)
2x USB Type Mini-B-to-3.5mm audio in/out jack
- **Console Connections**
1
- **Console Port Connectors**
1x PS/2 Keyboard 6-pin mini Din female
1x PS/2 Mouse 6-pin Mini Din female
1x HDB 15-pin female
1x 3.5mm audio in/out jack
1x 3.5mm mic in/out jack
- **Cables**
2x KVM Combo Cable sets (1.8m)
2x USB Mini-B-to-3.5mm Audio/Mic cables


Physical Specifications

- **PC Selection**
Push button
Hotkey Selection
Auto-switching
- **PC Port LED**
2 LEDs activity
- **VGA Resolution**
2048 x 1536 pixels
- **Power Type**
PS/2 Interface power
- **Size**
96mm (l) x 61mm (w) x 24mm (H)

Certifications

- FCC
- CE

Product Diagram

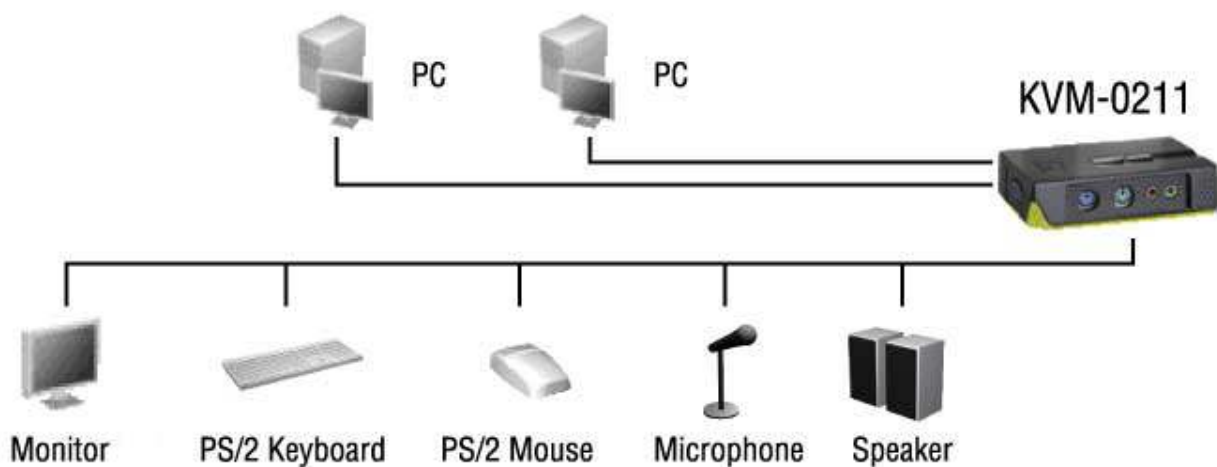

Order Information

KVM-0211: 2-Port PS/2 KVM Switch with Audio

Package Content

- KVM-0211
- KVM cable sets
- CD Manual
- Quick Installation Guide